

**PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.**

**QUOTATION - NOT FOR CONSTRUCTION**

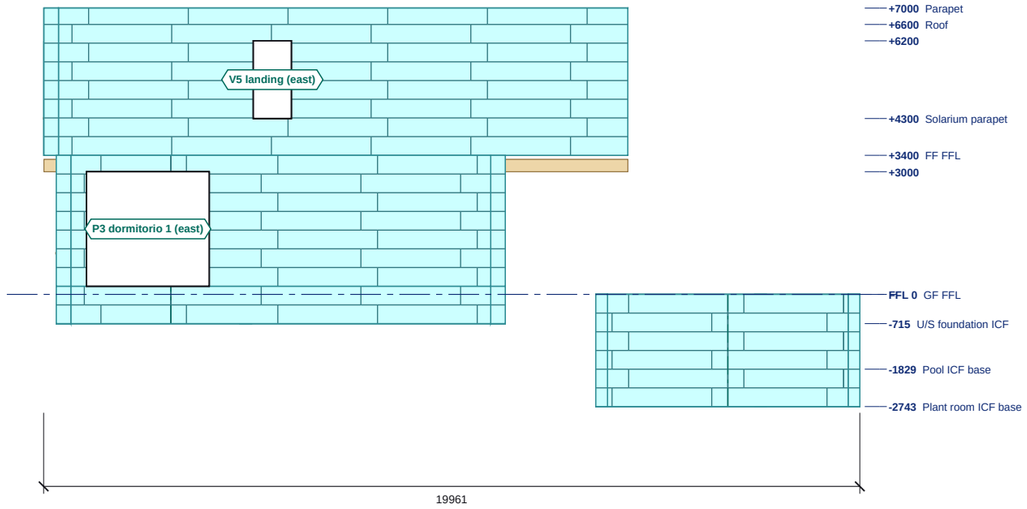


## EAST ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL; sills and heads in the schedule

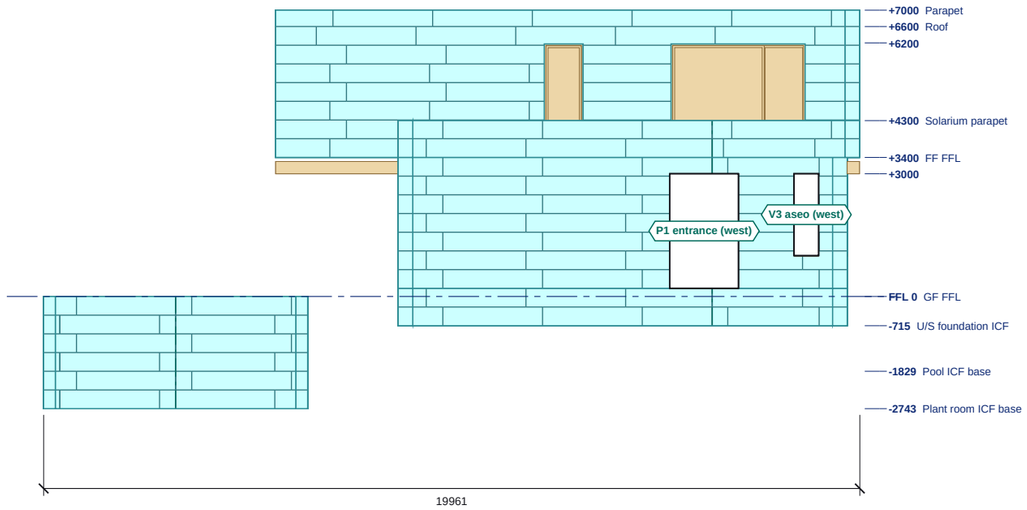


## WEST ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL; sills and heads in the schedule

0 1 2 3 4 5 6 7 8m

ICF external EPS face
Block course joint
Stack joint
Roof build-up (slab / earth / sedum)

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

## ELEVATION SCHEDULES

### EAST ELEVATION: OPENINGS

| Ref | Width | Height | Sill | Head | Lintel |
|---|---|---|---|---|---|
| P3 dormitorio 1 (east) | 3000 | 2800 | +200 | +3000 | - |
| V5 landing (east) | 930 | 1900 | +4300 | +6200 | - |

Structural openings in the ICF; sill and head above GF FFL.

### WEST ELEVATION: OPENINGS

| Ref | Width | Height | Sill | Head | Lintel |
|---|---|---|---|---|---|
| P1 entrance (west) | 1680 | 2800 | +200 | +3000 | - |
| V3 aseo (west) | 600 | 2000 | +1000 | +3000 | - |

Structural openings in the ICF; sill and head above GF FFL.

### EAST ELEVATION: LEVELS

| Level | FFL |
|---|---|
| Plant room ICF base | -2743 |
| Pool ICF base | -1829 |
| U/S foundation ICF | -715 |
| GF FFL | 0 |
| top of ICF | +3000 |
| FF FFL | +3400 |
| Solarium parapet | +4300 |
| top of ICF | +6200 |
| Roof | +6600 |
| Parapet | +7000 |

### WEST ELEVATION: LEVELS

| Level | FFL |
|---|---|
| Plant room ICF base | -2743 |
| Pool ICF base | -1829 |
| U/S foundation ICF | -715 |
| GF FFL | 0 |
| top of ICF | +3000 |
| FF FFL | +3400 |
| Solarium parapet | +4300 |
| top of ICF | +6200 |
| Roof | +6600 |
| Parapet | +7000 |

### NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. Roof build-up shown as modelled.
4. See ES26-082-GA-01 for plan setting out, lintels and steel.

### REVISIONS

| REV | DATE | DESCRIPTION |
|---|---|---|
| Q01 | 19.10.26 | First issue |

Nudura™ BuildEase

| CLIENT | PROJECT |
|---|---|
| Kume Arquitectura | Casa 7, Las Brenas, Lanzarote |

DRAWING TITLE

**EAST AND WEST ELEVATIONS**

ICF elevations with openings, levels and roof build-up

| SCALE | SIZE | DATE |
|---|---|---|
| 1:150 | A3 | 19.10.26 |
| DRAWN | CHECKED | APPROVED |
| TS | | |

| STATUS | DRAWING No. | REV |
|---|---|---|
| QUOTATION | ES26-082-EL-02 | Q01 |