
PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

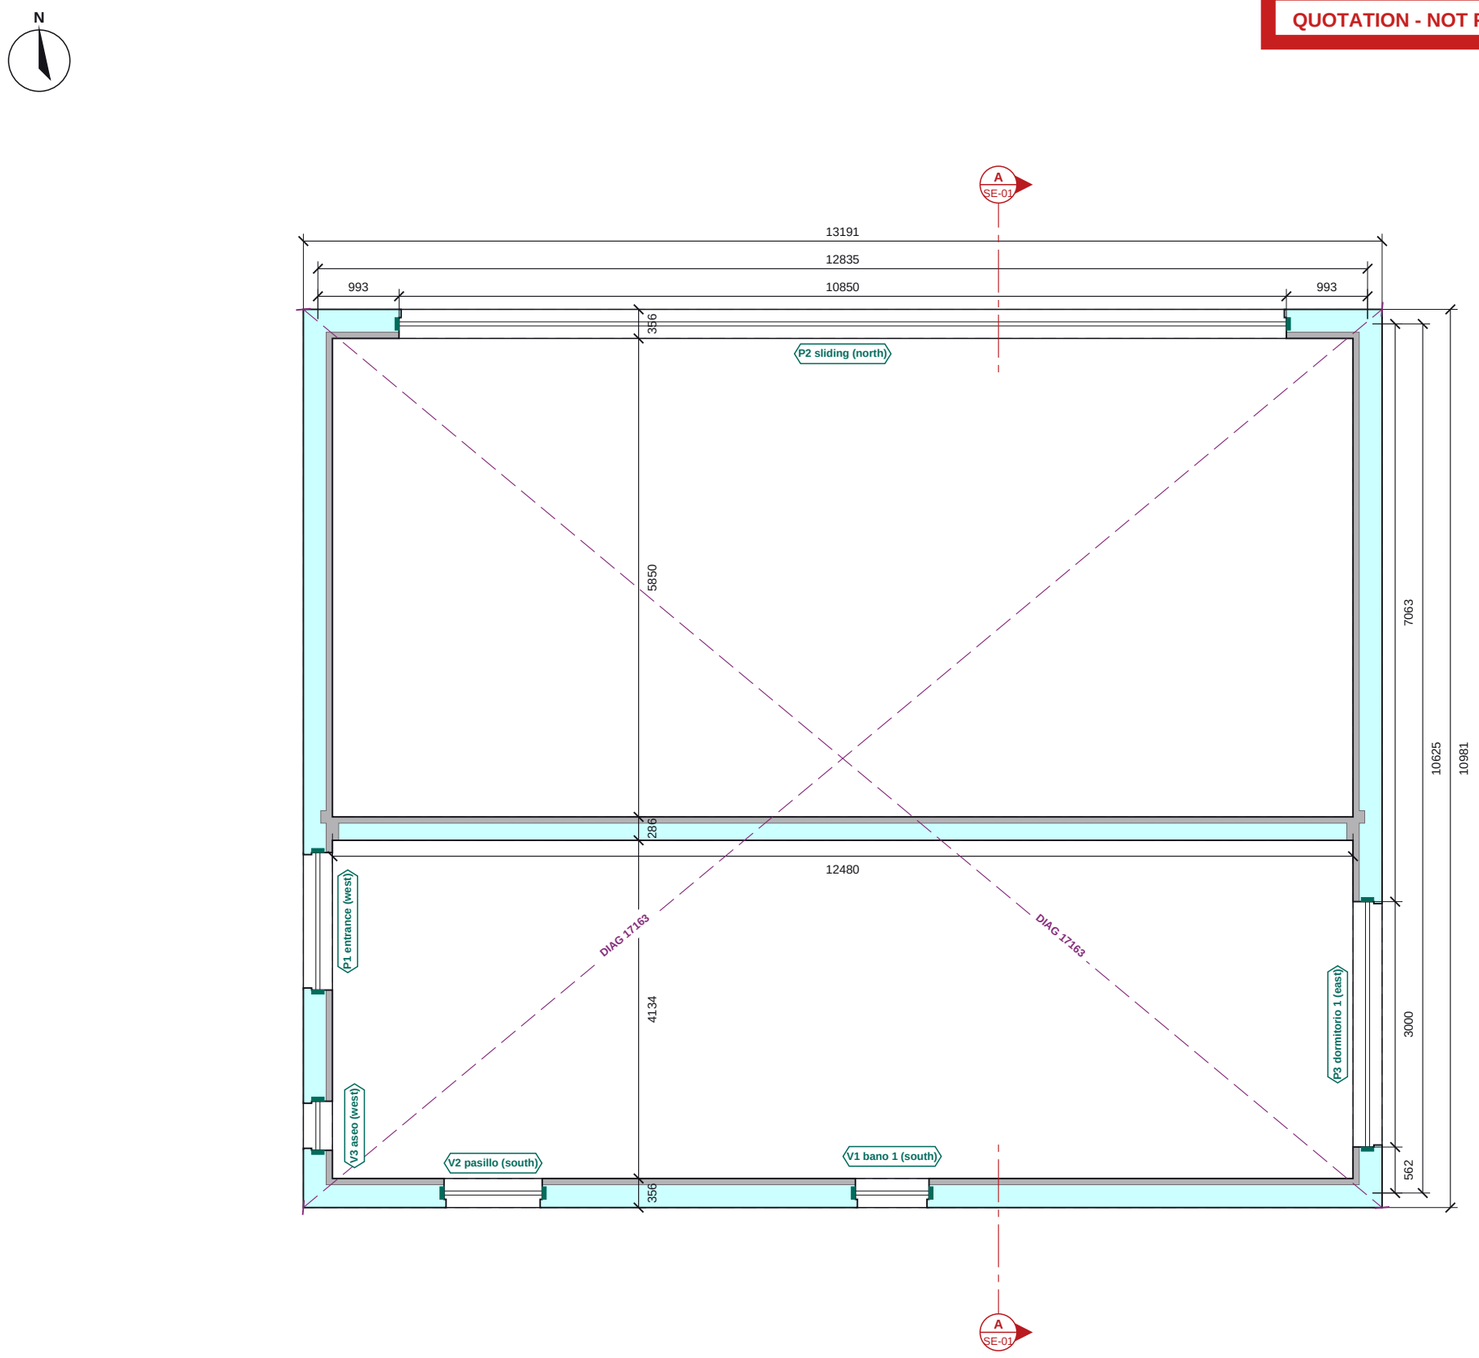

EPS insulation (Nudura form)
Concrete core
End cap at opening
ICF walls of the level below (dashed)
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

GROUND FLOOR ICF PLAN

Scale 1:75 @ A3 | Plan cut at +1680

0 1 2 3 4m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

GROUND FLOOR ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
P1 entrance (west)	1680	2800	+200	+3000	-
P2 sliding (north)	10850	2800	+200	+3000	-
P3 dormitorio 1 (east)	3000	2800	+200	+3000	-
V1 bano 1 (south)	900	2000	+1000	+3000	-
V2 pasillo (south)	1200	2000	+1000	+3000	-
V3 aseo (west)	600	2000	+1000	+3000	-

Structural openings in the ICF; sill and head above GF FFL.

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design exists (basic design only: RC + steel frame, pad footings and tie beams). ICF per the quotation model: 6in XR35 external walls, 6in Standard internal walls, pool and plant room. Core size to be confirmed by the structural engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Kume Arquitectura	Casa 7, Las Brenas, Lanzarote

DRAWING TITLE

GROUND FLOOR ICF GENERAL ARRANGEMENT

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:75	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-082-GA-03	Q01