
PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

N

- EPS insulation (Nudura form)
- Concrete core
- End cap at opening
- ICF walls of the level below (dashed)
- Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
- Setting-out check diagonal (external ICF corners)
- Section line (see SE sheet)

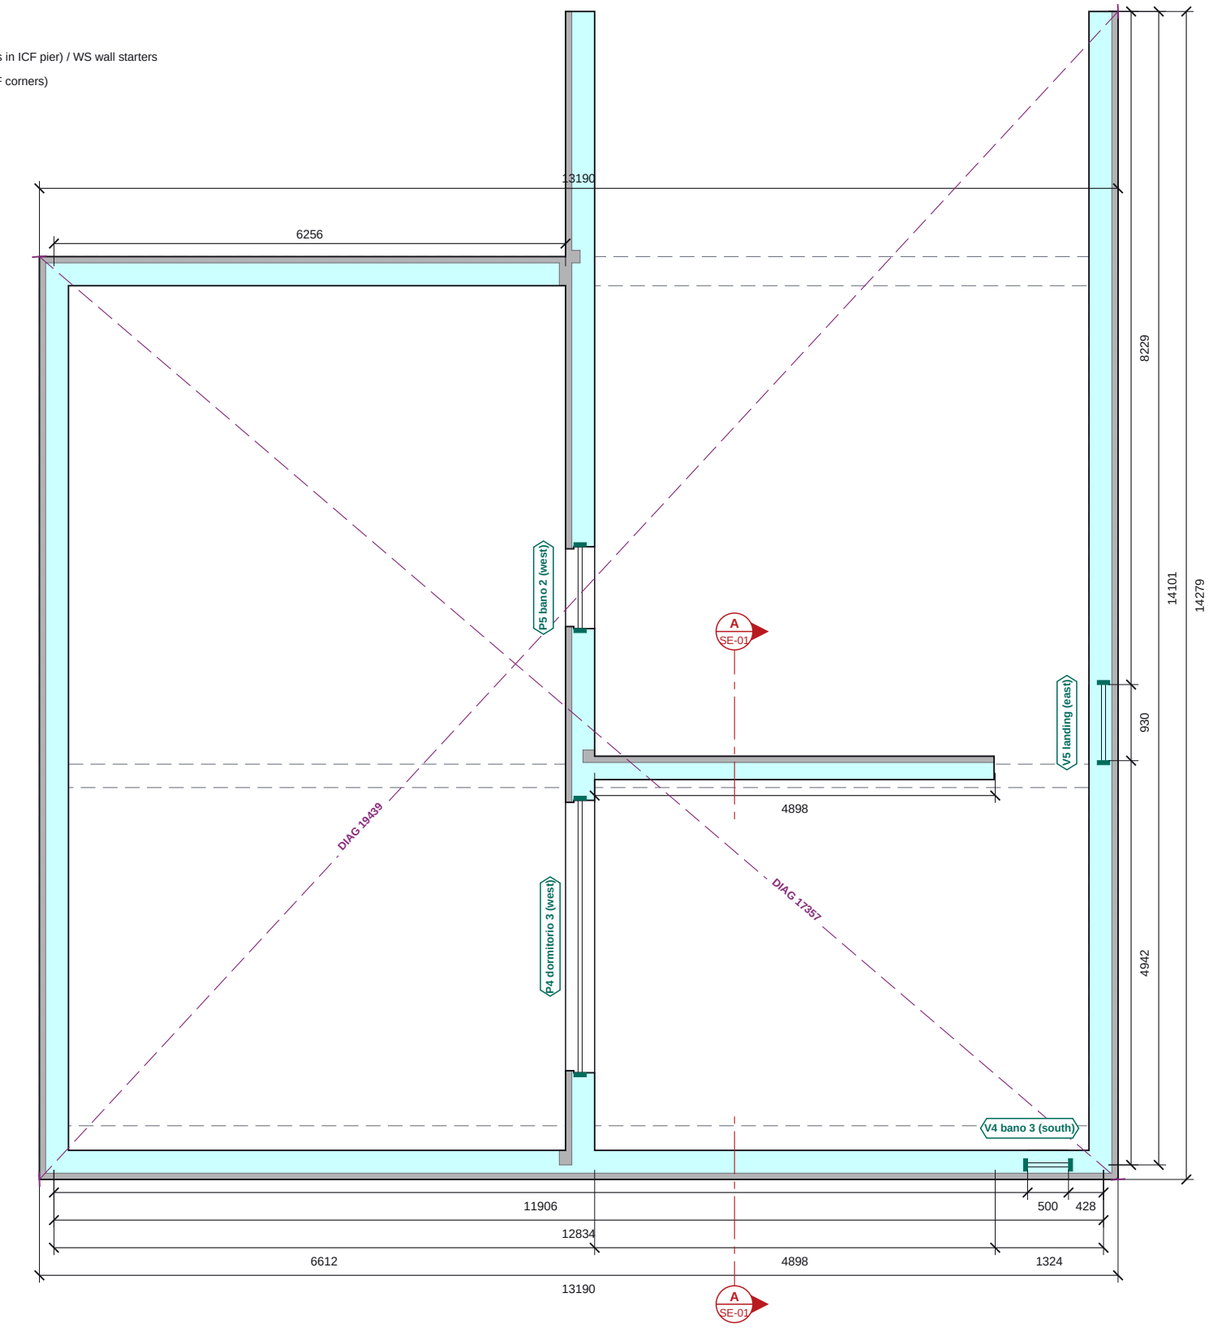

FIRST FLOOR ICF PLAN

Scale 1:75 @ A3 | Plan cut at +4000

0 1 2 3 4m

FIRST FLOOR ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
P4 dormitorio 3 (west)	3330	2800	+3400	+6200	-
P5 bano 2 (west)	1000	2800	+3400	+6200	-
V4 bano 3 (south)	500	1900	+4300	+6200	-
V5 landing (east)	930	1900	+4300	+6200	-

Structural openings in the ICF; sill and head above GF FFL.

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design exists (basic design only: RC + steel frame, pad footings and tie beams). ICF per the quotation model: 6in XR35 external walls, 6in Standard internal walls, pool and plant room. Core size to be confirmed by the structural engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Kume Arquitectura	Casa 7, Las Brenas, Lanzarote

DRAWING TITLE

FIRST FLOOR ICF GENERAL ARRANGEMENT

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:75	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-082-GA-04	Q01

Do not scale. All dimensions in millimetres; levels in metres from GF FFL. Check all dimensions on site.