
PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price. All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

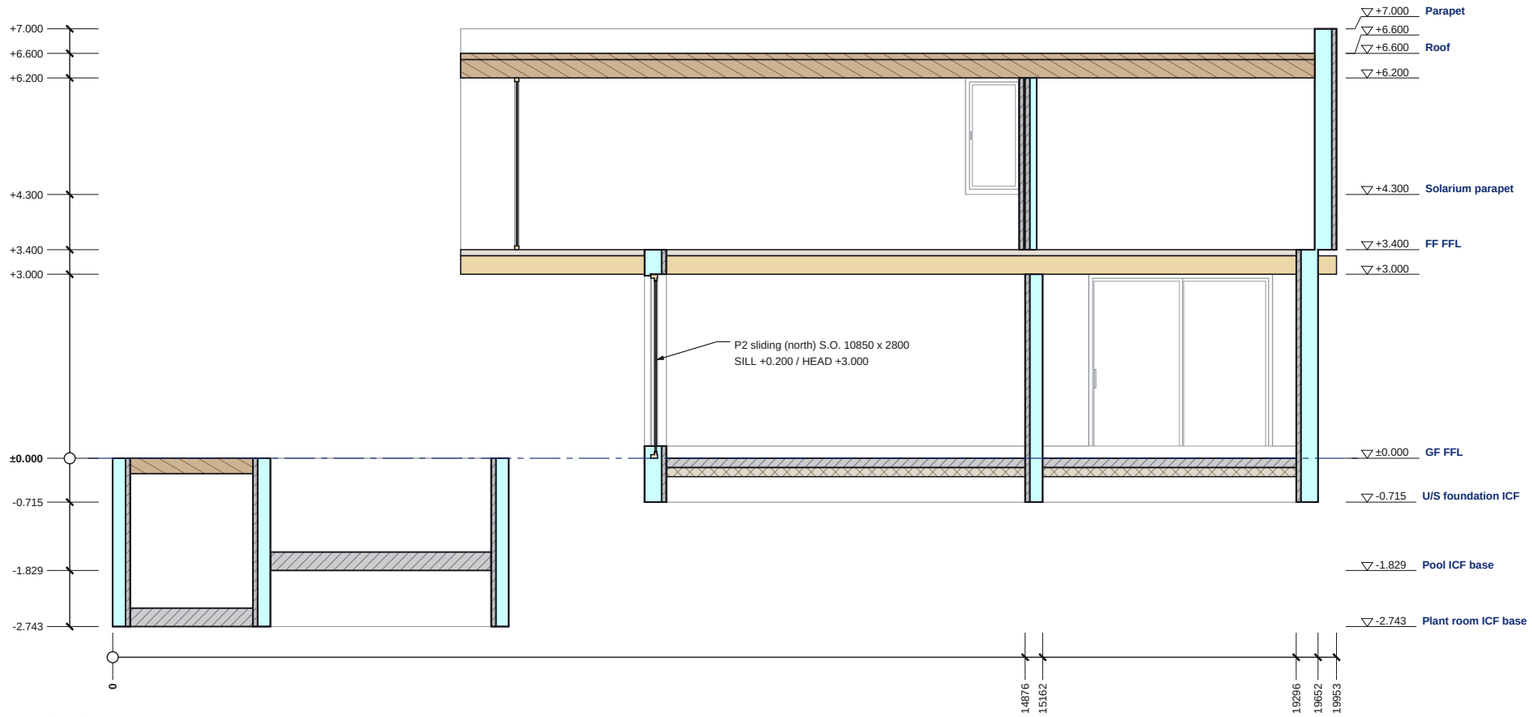

SECTION A-A

Scale 1:100 @ A3 | Looking east; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Beyond the cut (line work)

0 1 2 3 4 5m


Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

SECTION A-A SCHEDULES

LEVELS ON THIS SECTION

Level	FFL
Plant room ICF base	-2.743
Pool ICF base	-1.829
U/S foundation ICF	-0.715
GF FFL	±0.000
top of ICF W06	+3.000
FF FFL	+3.400
Solarium parapet	+4.300
top of ICF W06	+6.200
Roof	+6.600
Parapet	+7.000

SECTION KEY

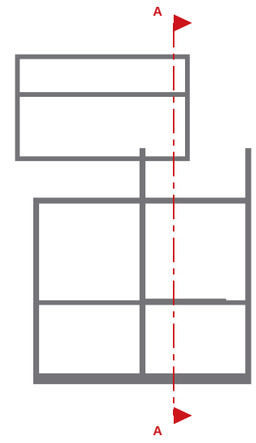

NOTES

1. Section A-A is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. No structural design exists (basic design only: RC + steel frame, pad footings and tie beams). ICF per the quotation model: 6in XR35 external walls, 6in Standard internal walls, pool and plant room. Core size to be confirmed by the structural engineer.
4. Steel marks, BOS / TOS: rev -. See ES26-082-GA-01 / EL-01 / EL-02 in the approval drawings pack.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Kume Arquitectura	Casa 7, Las Brenas, Lanzarote

DRAWING TITLE
SECTION A-A

ICF section with levels and build-ups

SCALE	SIZE	DATE
1:100	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-082-SE-01	Q01